

NViS 3542

ANPR/ LPR Mobile NVR Surveillance System with
Intel® Core™ i7/i5 processor, 1x PCIe slot



Main Features

- Support Intel® Core™ i7/i5 socket processor
- Mobile Intel® QM57 PCH
- Dual Intel® Gigabyte Ethernet ports
- Dual VGA/ DVI or VGA/ HDMI or DVI/ HDMI Display
- 3 x RS-232 and 1 x RS-232/422/485 with auto flow control
- On-board DC to DC power design to support 9V to 30V DC power input
- Support ATX power mode and PXE/WoL
- Support 3G/ Wi-Fi/ GPS communications
- 1 x PCIe x1 slot for ANPR / LPR video capture

Product Overview

Utilizing 32nm Intel® Core™ i7/ i5 processor, NViS 3542 series features Intel® Turbo Boost and Intel® Hyper-Threading technologies (2 cores, 4 threads), as well as on-processor graphics and two DDR3 800/ 1066 memory modules up to 8GB. In addition, NViS 3542 provides a wide variety of display I/O configurations and rich I/O interfaces including two Intel® GbE Ethernet ports, 5 x COM ports, 6 x USB, 8 x GPIO, 2 x SATAII, 2 x eSATA, audio interfaces. NViS 3542 is designed for LPR/ ANPR surveillance or a broad range of applications which demand intense graphics performance; these include medical diagnostic equipment.

Specifications

Main Board

- On-board Mobile Intel® QM57 Platform Controller Hub
- Support Intel® Core™ i7-620M PGA processor (2.66GHz, 4M cache)
- Support Intel® Core™ i5-520M PGA processor (2.4GHz, 3M cache)

Main Memory

- 2 x 240-pin memory DIMM, up to 8GB DDR3 800/1066MHz SDRAM, un-buffered and non-ECC

I/O Interface-Front

- ATX power on/off switch
- HDD access/ power status LEDs
- Wireless active LEDs
- 2 x antenna holes
- 2 x USB2.0 ports
- 1 x Line-out and 1 x Mic-in
- 1 x HDMI
- 1 x External SIM card holder

I/O Interface-Rear

- 2-Pin remote power on/off switch (support power ignition module)
- 9~30V DC input
- 1 x PS/2 for keyboard/ mouse

- 1 x DB15 male connector for GPIO (4 x input and 4 x output)
- 1 x DB44 serial port for 4 x RS232 (COM2: RS232/ 422/ 485 with auto flow control)
- 2 x GbE LAN ports
- 4 x USB2.0 ports
- 1 x DB15 VGA port
- 1 x DVI-D port
- 1 x Speaker-out and 1 x Mic-in

Storage

- 2 x 2.5" HDD driver bay (support 1 x 2.5 HDD with hot swap)

Communications

- WAL: through mini-PCIe for optional 3G/3.5G/GSM module
- WLAN: through mini-PCIe for optional Wi-Fi module (either one)
- GPS: through internal COM for GPS module


Expansion

- 1 x PCIe x1 slot for ANPR/ LPR video capture card
- 1 x mini-PCIe socket for 3G/ Wi-Fi (Depend on SKU# selected)

Dimensions

- 235mm (W) x 268 mm (D) x 101mm (H)

Dimension Drawing

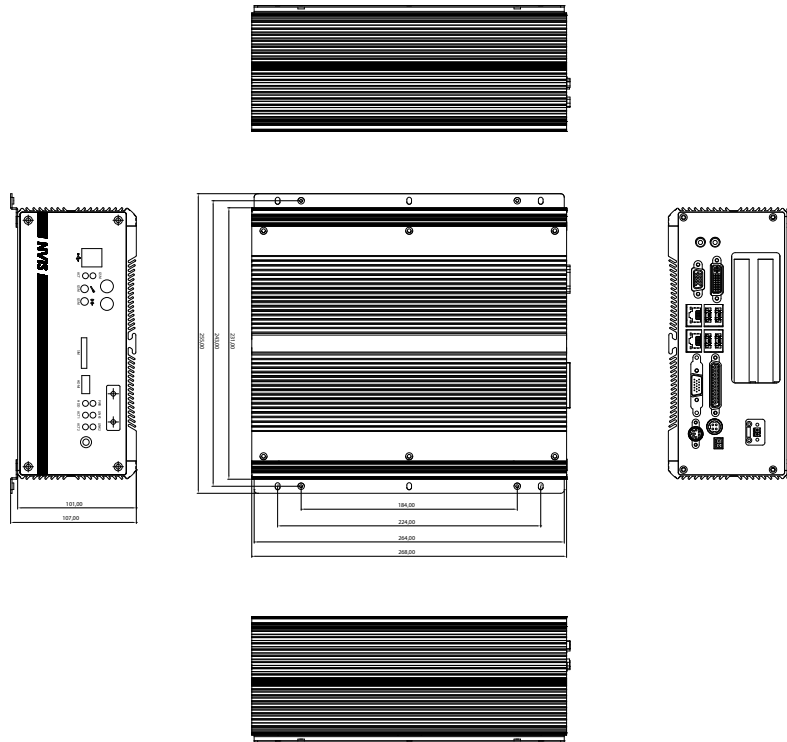

Construction

- Aluminum chassis

Environment

- Operating temperature:
- Ambient with air flow: -5°C ~ 55°C
(according to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C ~ 80°C
- Relative humidity: 10% to 93% (non-condensing)
- Vibration (random): 2g@5~500 Hz with SSD;
1g@5~500 Hz with HDD(in operation)
- Vibration: STD-810F-514.5 C3 -Composite wheeled vehicle
(SSD with vibration kit)

Certifications

- CE approval
- FCC Class A
- e13 Mark

Ordering Information

- **NViS 3542 (P/N: 10C00354202X0) RoHS Compliant**
ANPR/LPR Mobile NVR Surveillance System with Intel® Core™ i7/i5 processor, 1x PCIe slot, WWAN supported
- **NViS 3542W (P/N: 10C00354205X0) RoHS Compliant**
ANPR/LPR Mobile NVR Surveillance System with Intel® Core™ i7/i5 processor, 1x PCIe slot, WLAN supported

Optional Accessories

- **Anti-vibration kit (P/N: 88C00354002X0)**
- **9~36V Power ignition module NISKIG120 (P/N: 10JKIG12000X0)**